

g. 25-00

A

PTO/SB/05 (4/98)
14699/60

09/25/00

09/25/00
Jc921 U.S. PTO

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-003
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	
	First Inventor or Application Identifier	Hulstedt, Bryan
	Title	AIR EJECTION & COMPLIANT GAGE PIN FOR ROD CUTTING MACHINES
	Express Mail Label No.	EJ690636602US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 33] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) (Informal) [Total Sheets 6]	ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input type="checkbox"/> * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:
4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner _____ Group / Art Unit: _____
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS				
<input type="checkbox"/> Customer Number or Bar Code Label	20606	or <input type="checkbox"/> Correspondence address below		
(Insert Customer No. or Attach bar code label here)				
Name				
Address				
City	State	Zip Code		
Country	Telephone	Fax		

Name (Print/Type)	Keith Frantz	Registration No. (Attorney/Agent)	37828
Signature	<i>Keith Frantz</i>	Date	9-22-00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL

for FY 2000

*Patent fees are subject to annual revision.
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.*

TOTAL AMOUNT OF PAYMENT (\$)

Complete if Known

Application Number	
Filing Date	
First Named Inventor	Hulstedt, Bryan
Examiner Name	
Group / Art Unit	
Attorney Docket No.	

METHOD OF PAYMENT (check one)

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number

Deposit Account Name

☐ Charge Any Additional Fee Required Under 37 CFR §§ 1.16 and 1.17

2. ☒ **Payment Enclosed:**
☒ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity	Small Entity	Fee Description	Fee Paid
Fee Code (\$)	Fee Code (\$)		
101 690	201 345	Utility filing fee	690
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$) 690

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
16	-20** =	X	
3	-3** =	X	
Multiple Dependent			

**or number previously paid, if greater; For Reissues, see below

Large Entity Small Entity

Fee Code (\$)	Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 78	202 39	Independent claims in excess of 3
104 260	204 130	Multiple dependent claim, if not paid
109 78	209 39	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$)

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity	Small Entity	Fee Description	Fee Paid
Fee Code (\$)	Fee Code (\$)		
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	
Other fee (specify) _____			
Other fee (specify) _____			

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

SUBMITTED BY

Name (Print/Type)	Keith Frantz	Registration No. (Attorney/Agent)	37828
Signature		Telephone	(815) 987-9820
		Date	9-22-00

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

SPECIFICATION

To whom it may concern:

Be it known that I, Bryan Hulstedt, a citizen of the United States, residing at 6290 White Buck Trail, Rockford Illinois 61102, have invented a new and useful AIR EJECTION AND COMPLAINT GAGE PIN FOR ROD CUTTING MACHINES, of which the following is a specification.

AIR EJECTION AND COMPLAINT GAGE PIN FOR ROD CUTTING MACHINES

Background of the Invention

5 1. Field of Invention

The present invention relates generally to rod cutting machines.

10 More particularly, the invention relates to apparatus for automatic discharge of cut rods in closed-knife rod cutting machines, and which is particularly useful in connection with discharge of rods cut to a relatively short length and in high-speed machines.

15 2. Description of Prior Art

A number of rod cutting machines are known and available for cutting either wire stock or rod stock into shorter rods of a desired length, the cut rods being typically intended for further processing such as (but not limited to) in the production of roller bearings and other
20 generally cylindrical parts.

One such type of machine is a so-called "straighten and cut" machine. In this instance, wire is fed into the machine from a coil of wire, the wire is then straightened and drawn into a length of rod stock material, and then cut
25 into rods of the desired length.

Other machines are adapted for receiving and cutting elongated rod stock into shorter rods of a desired length.

Accordingly, it will be understood that reference to rod stock herein will include and alternately mean both pre-
5 shaped, pre-cut rod stock and/or a supply of wire provided to an appropriate rod cutting machine.

Most conventional prior rod cutting machines are equipped with an open knife for cutting rod stock into shorter rods. The rod stock is fed by, for example, a pair
10 of friction engaging rollers through a stationary cut-off support die and through a downwardly opening slot in the open knife until the stock extends through the knife a desired distance that will result in cut rods of the desired length. The rod stock is positioned in the knife with a gage
15 pin or other suitable structure having a gage surface located downstream of the knife, the free end of the rod stock engaging the free end or gage surface of the gage pin to stop the rod stock from advancing further in the knife, the gage pin typically being adjustable for establishing
20 different lengths of cut rods. With the rod stock in its desired position in the knife, an actuating mechanism actuates the knife downwardly to shear the rod stock at the junction between the knife and the cut-off die, producing a shorter rod cut to the desired length. The downwardly
25 opening slot in the open knife allows the cut rod to then simply fall away from the knife and into, for example, a

collection bin. The knife actuating mechanism then actuates the knife upwardly, returning the knife to the rod loading position, whereupon the rod stock automatically advances through and is positioned in the knife in preparation for
5 another cutting cycle.

As is well known, cut rods are deformed during the shearing process, resulting in a material condition known as "roll-over" at the cut ends. In order to reduce this material deformation during shearing of the rods, the
10 clearance between the knife and the adjacent end of the cut-off die is often reduced to within a few thousandths of an inch. Nevertheless, the lack of support under the rod extending past the cut-off die and through the open knife results in unavoidable distortion of the ends of the cut
15 rods during the shearing process.

In certain instances, such as when cutting relatively long rods of several inches in length, this roll-over may not be of substantial concern, and is addressed or compensated for in subsequent processing.

20 However, the shorter the length of the cut rods, the more pronounced this distortion becomes since it accounts for an increasing percentage of the rod length, and the more difficult it becomes to remove or compensate for during subsequent processing. In certain instances and for certain
25 subsequent processes, this distortion is simply not acceptable.

As a result, the open knife arrangement of conventional prior rod cutting machines is not suitable for use where precision cut rods with reduced end distortion are desired, and in particular, in connection with relatively short rods.

5 In order to reduce the distortion of cut rods, certain prior conventional rod cutting machines are equipped with a closed knife for shearing rods to the desired length. In this instance, the rod stock is again fed through the stationary cut-off die and the closed knife until the free end of the rod stock engages the free end of the gage pin. 10 The closed knife is characterized by a bore for receiving the rod stock, the bore at least substantially encircling and preferably complete encircling the rod stock, and having the same cross-sectional profile as the rod stock. In order 15 to provide for maximum support of the free end of the rod stock during the shearing operation, the bore is sized for a relatively close radial sliding clearance with the rod stock such as within a few thousandths or ten-thousandths of an inch radial clearance. As with the open knife, an actuating 20 mechanism actuates the closed knife to shear the rod stock at the junction between the knife and the cut-off die.

The support provided by the bore of the closed knife, and the relatively close clearance fit between the bore and the rod stock results in substantially less end deformation 25 and/or roll-over as compared with cutting the rod with a conventional open knife.

However, unlike the open knife machine, the cut rod can not simply fall away from the closed knife after the shearing operation. As a result, conventional prior closed-knife machines include a mechanical ejection arrangement including a second actuating mechanism for ejection of the cut rod from the closed knife. This second actuating mechanism is adapted for actuating an ejecting member at least partially into and out of the knife bore for ejection of the cut rod from the knife. After ejection of the cut rod and retraction of the ejection mechanism from the knife, the knife returns to the rod loading position whereupon the rod stock advances through the cut-off die and knife in preparation for another shearing cycle.

Although such conventional closed-knife rod cutting machines offer advantages over open knife machines with respect to reducing end deformation, operation of the closed knife and associated ejection apparatus suffer from several other drawbacks and disadvantages:

The need for the mechanical ejection apparatus including the second actuating mechanism raises the cost and reduces the reliability of a closed-knife machine as compared with an open-knife machine.

The need for contact between the ejection mechanism and the cut rod results in the need for a longer knife stroke, as compared with the stroke of an open-knife machine, in order for the cut rod to clear the cut-off die. Other

things being equal, this longer stroke results in a slow-down of production in the conventional prior closed-knife machine.

In order for the rod ejection mechanism to operate, it must be precisely timed and synchronized with the timing of the knife actuating mechanism. Error in this synchronization can result in work stoppage and/or damage to the machine.

The need for the ejection mechanism to actuate at least partially into and out of the bore in the closed knife can result in the need for an additional pause or slowing down of the knife actuation cycle, resulting in further reduction of the production rate of the closed-knife machine.

In such closed-knife machines, additional expensive apparatus is typically provided to compensate for the reliability, increased stroke and timing requirements of the mechanical ejection actuating mechanism, and to raise the production rates back up to approaching the rates of a typical open-knife machine.

The relatively close clearance between the knife bore and the rod, which is desirable to reduce distortion of the rod during the shearing operation, can result in jamming of the cut rod in the knife. This jamming results from the distortion at the cut end of the rod, and/or fine debris or shavings from the shearing operation that remain in the bore after the cut rod has been ejected. Consequently, as the

clearance is reduced to reduce the distortion, the greater the likelihood of the cut rod becoming lodged in the knife.

As a result of the presence of the gage pin in conventional machines, a cut rod that does become lodged in the knife and carried back to the loading station will typically result in interference with normal operation of and/or damage to the machine.

Moreover, prior closed knife rod cutting machines provide no means to insure that the knife bore is free of debris after the cut rod has been ejected.

Consequently, conventional ejection mechanisms of prior closed knife machines typically include provision to insure against such potential damage, such as with an ejection mechanism adapted to stroke entirely through the width of the bore in the knife. This results in a further slow down of the machine to accommodate the increased ejection mechanism stroke necessary to insure full ejection of the cut rod from the knife. Alternately, or in addition, the prior closed knife machine is equipped with safety mechanisms to detect a lodged cut rod and stop operation of the machine until the rod is cleared from the knife.

Thus, it is clear there is a need for a closed-knife rod cutting machine that includes automatic high-speed ejection of cut rods from the knife without the cost and complexity, and that solves and/or eliminates the above-

mentioned problems and disadvantages associated with operation of prior closed-knife machines.

5

Summary of the Invention

The general aim of the present invention is to provide new and improved apparatus for automatic ejection of cut rods in a closed-knife rod cutting machine; the apparatus being adapted to provide for high-speed operation with improved reliability and at less cost than prior closed-knife rod cutting machines.

A detailed objective is to achieve the foregoing by providing air ejection apparatus for automatic discharge of the cut rods from the closed knife as it moves away from the stock loading position.

A more detailed objective is to provide for such air ejection integrally in the cut-off die so as to further reduce the knife stroke and promote high speed operation.

Another more detailed objective is to provide complimentary air ejection means integral in the knife for automatic discharge of debris from the knife bore after ejection of the cut rod.

Another detailed objective of the invention is to provide a gage pin that is adapted for resilient movement, to automatically move out of the way in the event a cut rod

becomes lodged in the knife and is carried back to the loading station, such that the cut rod is automatically cleared from the knife as the rod stock advances through the knife; the gage pin automatically returning to its gaging position upon ejection of the cut rod such that the advancing rod stock is properly positioned in the knife prior to the next shearing cycle.

The invention also resides in the gage pin being provided with a tapered end adapted to assist in removal of a cut rod from the knife prior to reaching the loading station.

Yet another more detailed objective is to retract the gage pin from the free end of the rod stock at the moment the knife engages the rod stock and cutting of the rod begins.

These and other objectives and advantages of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

Briefly, in a preferred embodiment, the cut-off die is formed with an integral pneumatic line connected to an air supply, with the outlet of the pneumatic line positioned to eject the cut rod from the closed knife with a blast of air when the knife reaches the discharge position. The knife is provided with a second pneumatic line to carry air from the line in the cut-off die into the knife bore after the cut

rod has been ejected. The gage pin extends through a support slot defined between a base and a cap that is spring-loaded against the base. In the event a cut rod jams in the knife and is carried back toward the loading station, the free end of the gage pin and the cap raise up as the upwardly moving cut rod engages the free end of the gage pin. The gage pin is also preferably mounted for timed retraction from the rod stock as the knife engages and begins to cut the rod stock.

Brief Description of the Drawings

Figure 1 is a side view of a conventional prior open knife and gauging pin apparatus of a type suitable for use in a rod cutting machine.

Figure 2 is a view taken substantially along the line 2-2 of Figure 1.

Figure 3 is a side view of the apparatus of Figure 1 but showing the knife in position after shearing a rod piece from the rod stock.

Figure 4 is a view taken substantially along the line 4-4 of Figure 3.

Figure 5 is a side view similar to Figure 1 of a conventional prior closed knife and gauging pin apparatus.

Figure 6 is a view taken substantially along the line 6-6 of Figure 5.

Figure 7 is a side view similar to and of the apparatus of Figure 5 but showing the knife in its down position prior to ejection of the cut rod.

Figure 8 is a view taken substantially along the line 8-8 of Figure 7.

Figure 9 is a side view of a new and improved closed knife and gauging apparatus in accordance with the present invention, and suitable for use in a rod cutting machine.

Figure 10 is a view taken substantially along the line 10-10 of Figure 9.

Figure 11 is a side view similar to and of the apparatus of Figure 9 but showing the knife in its down position prior to ejection of the cut rod.

Figure 12 is a view taken substantially along the line 12-12 of Figure 10.

Figure 13 is a side view similar to and of the apparatus of Figure 9 but showing the knife in its down position with the cut rod being ejected from the knife.

Figure 14 is a side view similar to and of the apparatus of Figure 9 but showing the knife in its rod loading position with the rod stock advancing through the knife and toward the gage pin.

Figures 15 and 16 are views taken substantially along the line 15-15 and 16-16, respectively, of Figure 14.

Figure 17 is a side view of an alternate gauging pin embodiment of the present invention suitable for use in a rod cutting machine, with certain parts broken away and shown in cross-section.

5 Figure 18 is a top view of the alternate gauging pin embodiment of Figure 17.

Figure 19 is an end view taken substantially along the line 19-19 of Figure 17.

10 Figure 20 is a side view similar to Figure 17 but showing the gauging pin in a deflected position resulting from a jammed cut rod carried back to the rod-loading/gauging station.

Figure 21 is an end view similar to Figure 19 and taken substantially along the line 21-21 of Figure 20.

15 Figure 22 is a side view similar to Figure 17 but showing the rod stock advanced through the knife and engaging the gage pin prior to beginning of the shearing cycle.

20 Figure 23 is a view similar to Figure 22 but showing the knife in a position engaging the rod stock and showing the gage pin retracted from the rod stock.

While the invention is susceptible of various modifications and alternative constructions, certain illustrated embodiments have been shown in the drawings and
25 will be described below in detail. It should be understood, however, that there is no intention to limit the invention

to the specific forms disclosed, but on the contrary, the intention is to cover all modifications, alternative constructions, and equivalents falling within the spirit and scope of the invention.

5

Detailed Description of the Invention

For purposes of illustration, the present invention is shown in the drawings in connection with apparatus adapted for use in a rod cutting machine of the type adapted to cut rod stock into shorter rods of a desired length.

An open knife and certain associated parts of a conventional prior open-knife rod cutting machine are illustrated diagrammatically in Figures 1-4. In this instance, rod stock 10 is fed along its longitudinal axis in direction "A" by a pair of power-driven friction engaging rollers 12 through an opening 28 in a stationary cut-off support die 14 and through an open knife 16 until the free end of the rod stock engages the free end of a stationary gage pin 18 as shown in Figure 1.

In a conventional manner, (i) the opening 28 in the die 14 is sized for relatively close clearance with the outer diameter (or the outer profile of the stock in the event the stock has a cross-section other than round) for support of the stock during the shearing operation of the machine, and

(ii) the gage pin 18, although typically stationary during normal operation of the machine, is provided with means for longitudinal adjustment along axis direction "A" for cutting rods of different lengths.

5 As shown in Figures 2 and 4, the open knife 16 is characterized by a downwardly opening slot 20 with a width slightly larger than the diameter (or the maximum lateral dimension in the event the stock has a cross-section other than round) of the rod stock 10.

10 With the rod stock 10 in position against the gage pin 18, an actuating mechanism (not shown) of the rod cutting machine actuates the knife 16 downwardly in the direction indicated by arrow "B" in Figure 3. This knife stroke shears the rod stock 10 at the junction between the knife 16
15 and the cut-off die 14 to produce the short rod 10A cut to the desired length.

20 The downwardly opening slot 20 in the knife 16 allows the cut rod 10A to then simply fall away from the knife in the direction generally indicated by arrow "C" in Figure 3 and into, for example, a collection bin (not shown).

 The knife actuating mechanism then actuates the knife 16 upwardly, returning the knife to the rod loading position shown in Figure 1, whereupon the rod stock 10 advances through the knife in preparation for another cutting cycle.

25 A closed-knife apparatus of a conventional prior rod cutting machine adapted to reduce cut rod distortion and

roll-over is illustrated diagrammatically in Figures 5-8. In this instance, the rod stock 10 is again fed in direction "A" by the friction rollers 12 through the stationary cut-off die 14 and a closed knife 22 until the free end of the rod stock engages the stationary gage pin 18.

As shown in Figures 6 and 8, the closed knife 22 is characterized by a bore 24 having the same cross-sectional profile (i.e., round in the embodiment shown) as the rod stock, with the bore 24 typically being sized for a relatively close radial sliding clearance with the rod stock such as within a few thousandths or ten-thousandths of an inch.

As with the open knife 16, an actuating mechanism (not shown) actuates the closed knife 22 downwardly as indicated by arrow "B" in Figure 7, and the rod stock is sheared at the junction between the knife 22 and the cut-off die 14 to produce the short rods 10A of the desired length.

The closed-knife rod cutting machine also includes an ejection member generally indicated at 26 and an operatively associated second actuating mechanism (not shown) for ejection of the cut rod 10A from the knife.

In this instance, the second actuating mechanism is adapted for actuating the member 26 in opposite directions indicated by arrow "D" generally between the position shown in Figure 7 and a second position at least partially in the bore 24 for contacting the end of the cut rod and ejecting

the cut rod from the knife 22 generally along trajectory
"E".

After ejection of the cut rod 10A and retraction of the
ejecting member 26 from the knife 22, the knife returns to
the rod loading position shown in Figure 5 whereupon the rod
stock 10 advances through the cut-off die 14 and knife for
another shearing cycle.

In accordance with one aspect of the invention, a
closed-knife rod cutting machine is provided with air
ejection operable to automatically eject cut rods 10A from
the knife.

For purposes of illustration, a preferred embodiment of
closed-knife air ejection according to the invention is
shown diagrammatically in the drawings in Figures 9-16.

In carrying out this aspect of the invention, the rod
cutting machine is provided with an air transport line such
as line 36 having (a) an inlet end 44 adapted for connection
to an air supply (not shown), and (b) an outlet end 46 (i)
proximate to and discharging toward the upstream side of the
closed knife 32, and (ii) positioned for alignment with the
bore 34 in the knife when the knife is stroked into its down
position as shown in Figure 11.

With this arrangement, providing pneumatic pressure
and/or a sufficient flow capacity to the line 36 results in
(a) automatic non-contacting pressurized ejection of the cut
rod 10A from the bore 34 of the knife as the knife

approaches and/or reaches its down stroke or ejection position as shown in Figure 13, and (b) automatic discharge of debris remaining in the opening 34 with the blast of air flowing therethrough as the rod is ejected. The ejection
5 air supply can either be provided intermittently and timed with the knife cutting cycle, or preferably be supplied on a continuous basis during normal operation of the machine.

In preferred embodiments, the pneumatic line 36 is provided internally in the cut-off die 30 such as
10 illustrated in the drawings. This arrangement reduces the necessary stroke of the knife 32 to a minimum, with no additional tubes or moving parts and minimal impact on the cost of the machine.

In further carrying out this aspect of the invention,
15 the closed-knife rod cutting machine is preferably provided with a second pneumatic transport line such as line 38 adapted to discharge into the bore 34 of the knife prior to and/or during loading of the knife with the advancing rod stock (see Figure 15), and during the rod shearing
20 operation. Advantageously, this second pneumatic line assists in (a) clearing additional debris from the bore 34, and (b) provides a cushioning supply of air in the annulus 42 between the rod stock 10 and the bore 34 as the rod stock advances through the knife.

25 In the preferred embodiment shown, the knife 32 is provided with the internal pneumatic transport line 38

having (a) an inlet aligned with outlet 46 of the line in the cut-off die 30 when the knife is in the rod loading position as shown in Figure 9, and (b) an outlet opening into the knife bore 34 through which the rod stock 10 passes, with a plug 40 installed after drilling of the air transport line 38 during manufacture of knife.

Advantageously, providing the line 38 integral in the knife results in a compact closed-knife cutting arrangement with no additional parts and substantially no additional cost to the rod cutting machine.

From the foregoing, it will be apparent that a rod cutting machine equipped with a closed knife and air ejection discharge according to the invention offers several advantages over and solves several problems associate with prior closed-knife rod cutting machines:

Air ejection results in the elimination of the second actuating mechanism and associated components for mechanical ejection of the cut rod from the knife.

The blast of air that clears the knife bore 34 before or during each stroke, and the cushioning air during loading of the rod stock, reduces the likelihood that a cut rod will jam in the knife.

In many shop environments, a source of compressed air is available throughout the plant as "shop" air. In such instances, the cost of implementing air ejection is simply the small cost of machining a few internal pneumatic lines

in the cut-off die and knife. And where necessary, the cost of providing a source of compressed air is relatively small compared with the cost and complexity of operation associated with the second actuating mechanism and
5 mechanical ejection of cut rods in prior closed-knife machines.

Thus, air ejection results in a substantial reduction in cost and operating complexity of closed-knife rod cutting machines, and eliminates the need for synchronized operation
10 of the ejection mechanism.

As will be evident from the embodiment shown in the drawings, air ejection also enables the length of the knife stroke to be substantially reduced as compared with prior closed knife machines. As a result, air ejection permits
15 the machine to operate at a relatively higher production rate.

In view of the forgoing, it is clear that a closed knife rod cutting machine provided with air ejection discharge is capable of operating at a faster production
20 rate, with less complexity and expense, and with increased reliability, than prior closed-knife machines.

In accordance with another aspect of the invention, a closed-knife rod cutting machine is equipped with a gauge pin that is uniquely adapted and configured to permit and
25 assist in automatically clearing a cut rod 10A that may be

lodged in the shearing knife 32 during its return stroke B' as shown in Figure 20.

In this instance, the gage pin is adapted for automatic movement away from its normal position in the event a cut rod 10A is lodged in the knife 32 -- to permit the rod stock 10 advancing through the knife to clear the cut rod 10A from the knife upon its return to the loading position.

In preferred embodiments, the gage pin is provided with a tapered end to assist in (a) dislodging the rod prior to the knife reaching the stock loading position, and (b) guiding the dislodged cut rod away from the knife.

For purposes of illustration, one embodiment of a preferred gage pin 72 and associated apparatus (collectively indicated as apparatus 60) according to the invention is shown in the drawings in Figures 17-21. In this instance, the apparatus 60 includes a base 62, and front and rear supports 66 and 64, respectively, connected to the base 62. The gage pin assembly 68 includes a rear pin 70 threaded into the rear support 64, and a front gage pin 72 slidably received through a bore 78 extending between the front support 66 and a cap 74. The free end of the gage pin 72 is adjustable longitudinally toward and away from the knife 32, for positioning of the free end of the rod stock 10 as it loads through the knife, such as by turning the rear pin 70 in the rear support 64 with nut 90, and locking the rear pin 70 in position with jam nuts 92. The gage pin 72 is

relatively stiff in the axial direction "A" to provide consistent, precise positioning of the rod stock in the knife upon impact of the advancing rod stock against the free end of the gage pin.

5 In carrying out this aspect of the invention, the gage pin 72 is adapted for resilient movement in the direction B' from its normal position aligned with the advancing rod stock. In the embodiment shown, the gage pin 72 and rear pin 70 are connected such as with a collar 76 or alternate
10 connecting means adapted to allow angular movement of the gage pin 72 with respect to the rear pin 70 in the direction of the return knife stroke. In this instance, the collar is fixed to the right end of the gage pin, and the left end of the rear pin is slidably received into a socket formed in
15 the collar. Alternately, for example, the gage pin 72 and rear pin 70 are connected with a ball-joint or other arrangements suitable for simultaneously permitting the desired angular movement while preventing longitudinal separation between the pin members such as including
20 retaining rings, or spring biasing means.

As shown in Figure 19, the bore 78 is defined by two aligned slots 80 and 82 formed in the mating surfaces of the cap 74 and the front support 66, respectively. The cap 74 is resiliently connected to the front support 66 by a pair
25 of compression springs 88 elastically compressed between the head of a pair of fasteners 84 and a cap 74; the threaded

fasteners 84 being (a) spaced laterally on each side of the bore 78, (b) slidably received through bores 86 formed in the cap 74, and (c) threaded into the front support 66.

With this arrangement, application of an upwardly directed external force on the gage pin 72 lifts the cap 74 from the front support 66, and the springs 88 return the cap downwardly into contact with the housing upon removal of the external force.

Normal operation of the rod cutting machine equipped with the gaging pin apparatus 60 proceeds as previously described. With the knife 32 in the rod loading position, the rollers 12 feed the rod stock 10 in the direction "A" through the bore 34 of the closed knife 32 until the free end of the rod stock engages the free end of the gage pin 72. The knife 32 then strokes downwardly, shearing the rod 10A from the rod stock, and the cut rod aligns with the outlet of the air port 36 for pressurized air ejection from the knife such as shown in Figure 17.

In the event the cut rod 10A is not fully ejected, it will be carried upwardly toward the loading station during the return stroke B' of the knife. The returning cut rod results in application of an upwardly directed force on the end of the gage pin 72, raising the free end of the gage pin and the cap 74 from the front support 66 as shown in Figures 20 and 21. The rod stock 10 then feeds through the knife 32, dislodging the cut rod from the knife, whereupon the

005260" T.262960
springs 88 cause the cap 74 to snap back into position on
the front support, quickly repositioning the gage pin 72 for
gauging the rod stock in the knife for the next shearing
cycle before the free end of the advancing rod stock reaches
5 the position of the gage pin.

Thus, the gage pin 72 is uniquely adapted for resilient
movement in the same direction as the knife during its
returning stroke to permit automatic clearing of a cut rod
carried back toward the loading position in the knife
10 without interference with or slowdown to the normal
operation of the rod cutting machine.

In further carrying out this aspect of the invention,
the free end of the gage pin 72 is preferably formed with a
taper 96 on the lower portion thereof, the taper sloping
15 downwardly upon progressing away from the knife. If the
knife returns upwardly with a cut rod 10A, the cut rod will
engage this taper 96, resulting in a reaction force on the
free end of the cut rod directed at an angle downwardly and
away from the knife. As a result, the taper assists in
20 loosening the cut rod from the knife, and in instances where
the pin has been substantially ejected but hangs at the end
of the knife, the taper may alone be sufficient to dislodge
and guide the cut rod from the knife prior to reaching the
loading station.

25 In the embodiment shown, the gage pin 72 is formed with
square cross-section and the bore 82 is formed with a

complimentary square cross-section. Although it is evident the gage pin and bore 82 may be made round, or formed with any other convenient cross-section, it has been found that a rectangular or square cross-section provides certain

5 advantages. In particular, the complimentary square gage pin and upper slot 80 are in substantially line-to-line contact as the pin is raised upwardly. This reduces the likelihood that the gage pin will shift sideways, as a result of manufacturing tolerances in the side clearance
10 between the pin and the slot, as the cap is raised from the front housing. In addition, for a gage pin of a given height, a square pin is stiffer than a round pin, thus assisting in providing for accurate, consistent positioning of the rod stock in the knife prior to shearing. Moreover,
15 as compared with a round cross-section, the square cross-section assist in preventing the pin from twisting or bending other than in the B-B' directions.

In further carrying out the invention, the gage pin 72 is timed to retract from engagement with the rod stock 10 at
20 the moment the knife 32 engages the rod stock during the cutting cycle. Engagement between the knife and the rod stock prevents the rod stock from advancing as the gage pin retracts, and retraction of the gage pin prevents the cut rod 10A from dragging against the gage pin as it is cut and
25 carried in the knife toward the discharge station.

In the embodiment shown, the base 62 is mounted for linear forward and reverse movement along the "A" direction as indicated by arrow G-G' in Figure 22. Since the gage pin 72 is fixed to the base through rear pin 70 and rear support 64, the gage pin moves linearly with the base. The movement of the base 62 and thus the gage pin 72 is controlled and timed for retraction in the G direction when the knife strokes sufficiently in the B direction to engage the rod stock. Engagement between the knife and the rod stock, and retraction of the gage pin is generally shown in Figure 23. Upon completion of the shearing operation and prior to the knife returning to the loading position, the gage pin returns to its gaging position (such as shown in Figure 17), in preparation of another shearing cycle, and as discussed above to assist in ejection of a cut rod that may not have been fully ejected from the knife at the discharge station.

In a preferred embodiment, the base 62 is mounted to a linear slide arrangement (not shown), and is connected to an appropriately timed actuating mechanism such as a cam-driven actuator for synchronized operation with the actuating mechanism controlling movement of the knife 32. This and alternate arrangements for effecting linear movement of the base 62 and gage pin 72 in timed relation with movement of the knife 32 are well known and within the design capability of skilled artisans.

In summary, from the foregoing, it will be apparent that the present invention brings to the art new and improved ejection apparatus for use in a closed-knife rod cutting machine, the apparatus being uniquely adapted for automatic air ejection of cut rods and cleaning of the knife bore. A preferred embodiment also includes a gage pin adapted to (i) retract at the moment the knife engages the rod stock during the cutting cycle, (ii) automatically move out of the way in the event a cut rod is not fully ejected and is carried in the knife back toward the loading station, to permit the cut rod to be automatically cleared from the knife by the advancing rod stock, and to then resiliently return to position for gaging the rod stock in the knife, and (iii) tapered to assist in clearing of a cut rod as it approaches the loading station. As a result, the present invention provides for reliable, automatic, low cost, and high speed cut rod ejection from the closed knife without the cost, complexity of operation, and concern for timing between the knife stroke and mechanical ejection apparatus of prior closed-knife rod cutting machines.

I claim:

1. A machine adapted to cut rods from rod stock, the machine comprising:

5 - means for advancing the rod stock;

 - a closed knife mounted for reciprocating movement between first and second positions, said knife having an opening through which the advancing rod stock passes when the knife is in said first position, said knife being
10 adapted to shear off a rod from the rod stock upon moving toward said second position; and

 - an air supply positioned upstream of the knife to discharge the cut rod from the knife.

15 2. The machine as defined in claim 1 in which said air supply is positioned in alignment with the opening in the knife when the knife is in said second position.

3. The machine as defined in claim 2 in which said air
20 supply includes a first air transport line having a discharge end aligned with the opening in the knife when the knife is in said second position.

4. The machine as defined in claim 3 further comprising a
25 support die having an opening through which the advancing

stock passes upstream of the knife, and in which said first air transport line extends through said die.

5. The machine as defined in claim 2 in which said air supply further includes a second air transport line discharging into the opening in said knife.

6. The machine as defined in claim 5 in which said second air transport line extends through said knife and is positioned to receive air from said first transport line.

7. The machine of claim 1 further comprising a gage surface located to position the advancing rod stock in the knife, said gage surface being connected for resilient movement as the knife returns to said first position to enable discharge of the sheared rod from the knife in said first position by the advancing stock in the event the rod is not fully discharged by said air supply and is carried back to said first position in the knife.

20

8. The machine of claim 7 further comprising a gage pin having an end defining said gage surface, said gage pin being formed with a tapered portion positioned for engagement with the rod as the rod approaches said first position to assist in the removal of the rod from the knife.

9. A machine adapted to cut rods from rod stock, the machine comprising:

- means for advancing the rod stock;

- a closed knife mounted for reciprocating movement between first and second positions, said knife having an opening through which the advancing rod stock passes when the knife is in said first position, said knife being adapted to shear off a rod from the rod stock upon moving toward said second position; and

- a gage surface located to position the advancing stock in the knife, said gage surface being connected for resilient movement as the knife returns to said first position to enable discharge of the sheared rod from the knife in said first position by the advancing stock.

10. The machine of claim 9 further comprising a gage pin having an end defining said gage surface, and in which the sheared rod engages the gage pin and causes said resilient movement thereof as the knife returns to said first position.

11. The machine of claim 10 further comprising a base and a cap connected to the base for resilient movement therebetween, said gage pin being operatively connected to said cap such for resilient movement therewith.

13. A machine adapted to cut rods from rod stock, the machine comprising:

- means for advancing the rod stock;

- a closed knife connected for reciprocating linear movement between first and second positions, said knife having an opening extending along said axis and through which the advancing rod stock passes when the knife is in said first position, said knife being adapted to shear off a rod from the rod stock upon moving toward said second

position;

- an air supply positioned upstream of the knife to discharge the sheared rod from the knife when in said second position; and

- a gage pin located to engage the downstream end of the advancing rod stock to position the stock in the knife,

- the gage pin being connected for resilient linear movement with the knife as the knife returns to said first position to enable discharge of the rod from the knife by the advancing stock in the event the sheared rod is not fully ejected by said air supply and is carried back toward said first position in the knife.

14. The machine of claim 13 further comprising a base and a cap connected to the base for resilient movement

therebetween, said gage pin passing between said base and

said cap such that the resilient movement of the cap enables said resilient movement of the gage pin.

15. The machine of claim 13 in which the gage pin is formed
5 with a tapered portion positioned for engagement with the rod as the rod approaches said first position to assist in removal of the rod from the knife.





16. The machine of claim 13 further comprising a support die
10 having an opening through which the advancing rod stock passes upstream of the knife, and in which said air supply includes an air transport line extending through the die and having a discharge end aligned with the opening in the knife when the knife is in said second position.

15





Abstract of the Disclosure

A closed-knife rod cutting machine is provided with air ejection apparatus for automatic discharge of cut rods. The gage pin is compliant in the direction of the knife return stroke to permit ejection of a lodged cut rod by the advancing rod stock. The free end of the compliant gage pin is tapered to assist in clearing cut rods loosely lodged in knife, and the gage pin is timed to retract when the knife engages the rod stock at the beginning of the cutting cycle.





[illegible]

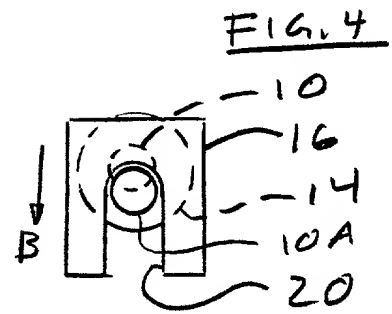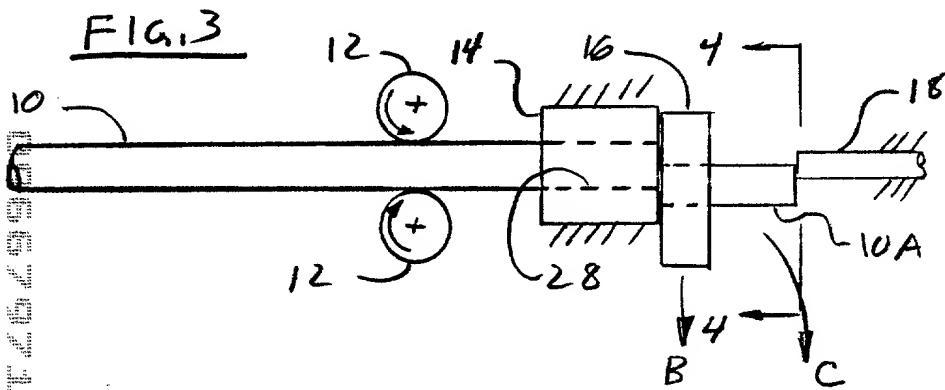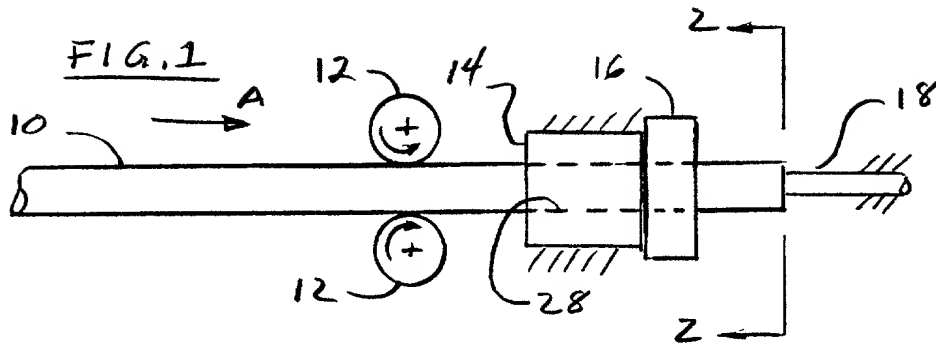





PRIOR ART - OPEN KNIFE

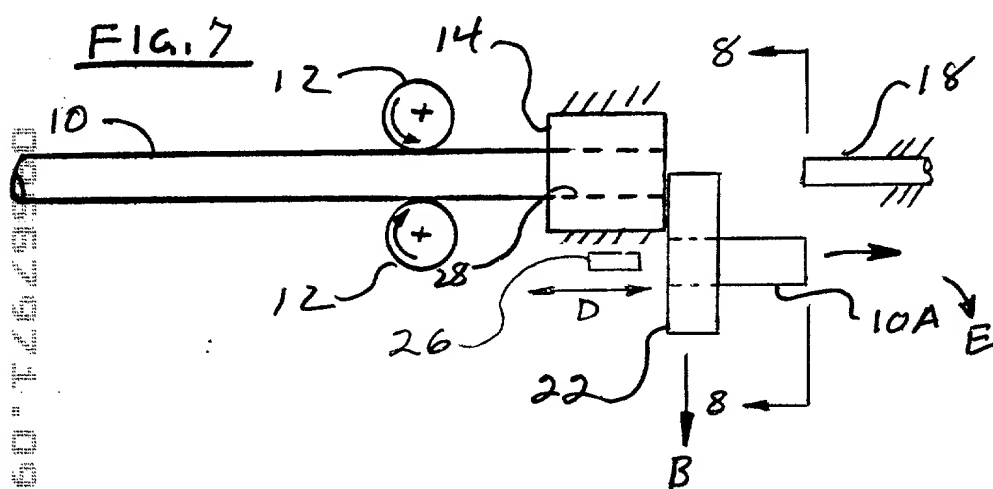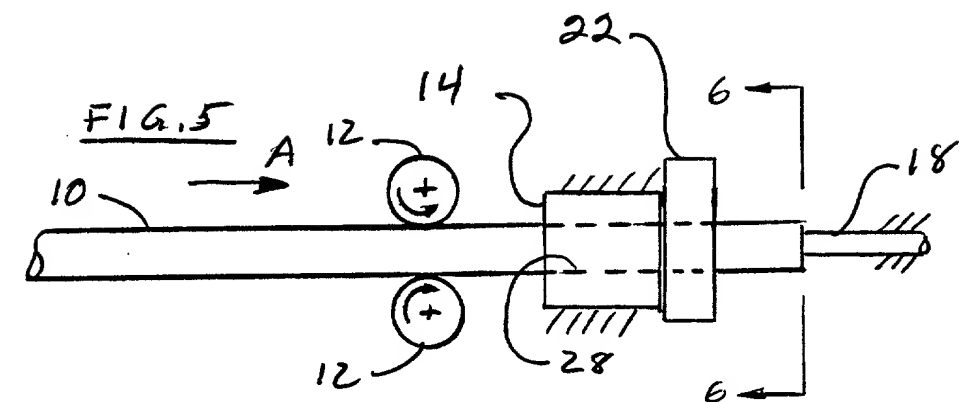

PRIOR ART - CLOSED KNIFE

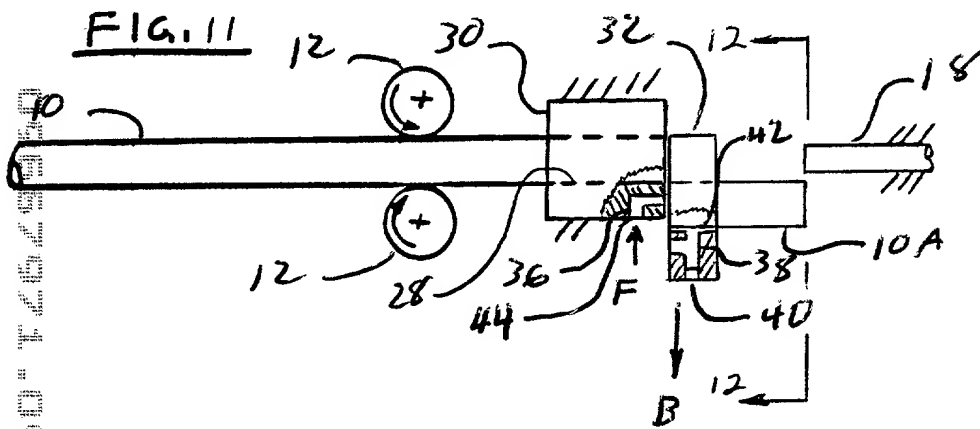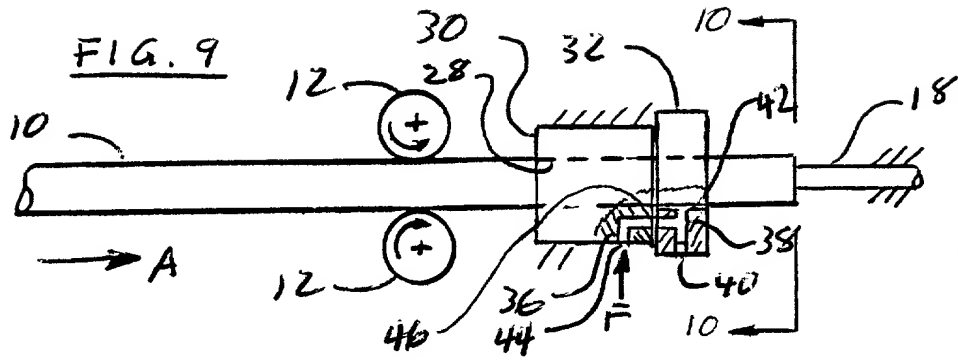

005260-16500

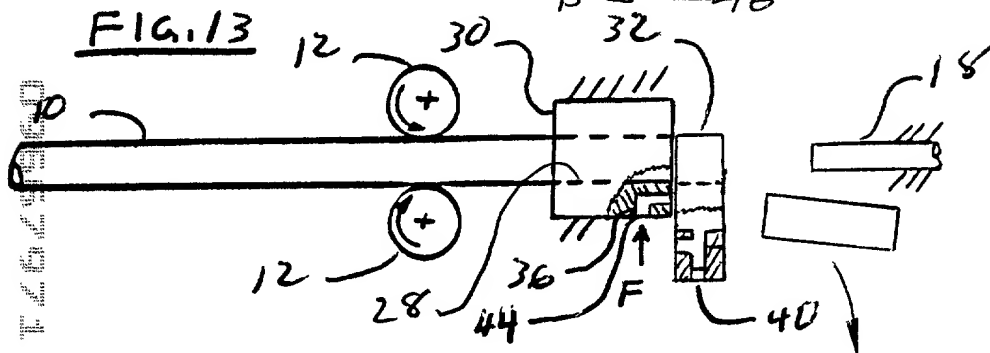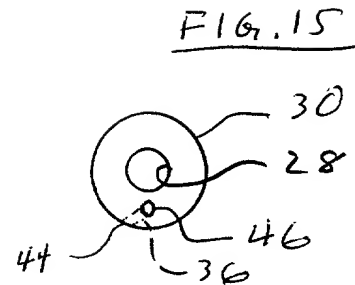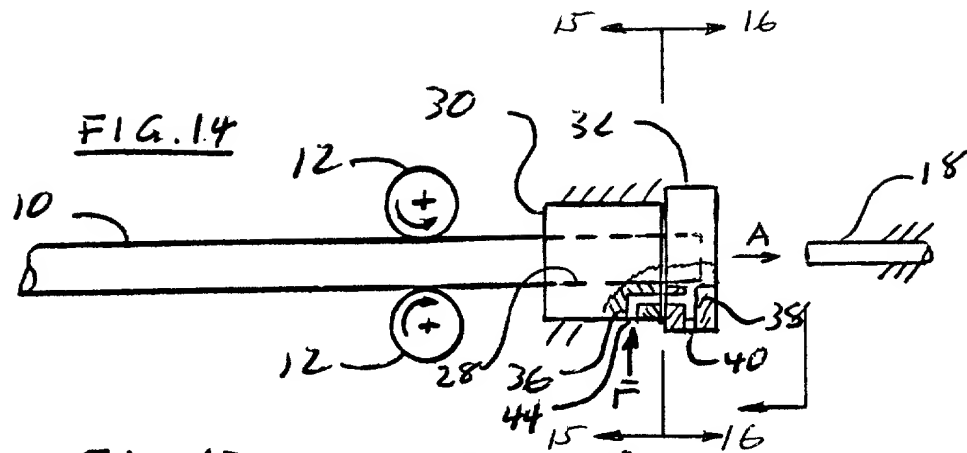

005260-1-09500

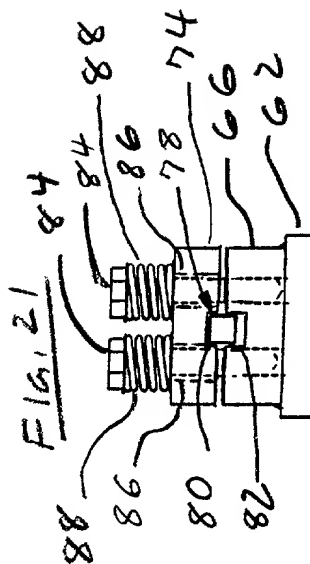
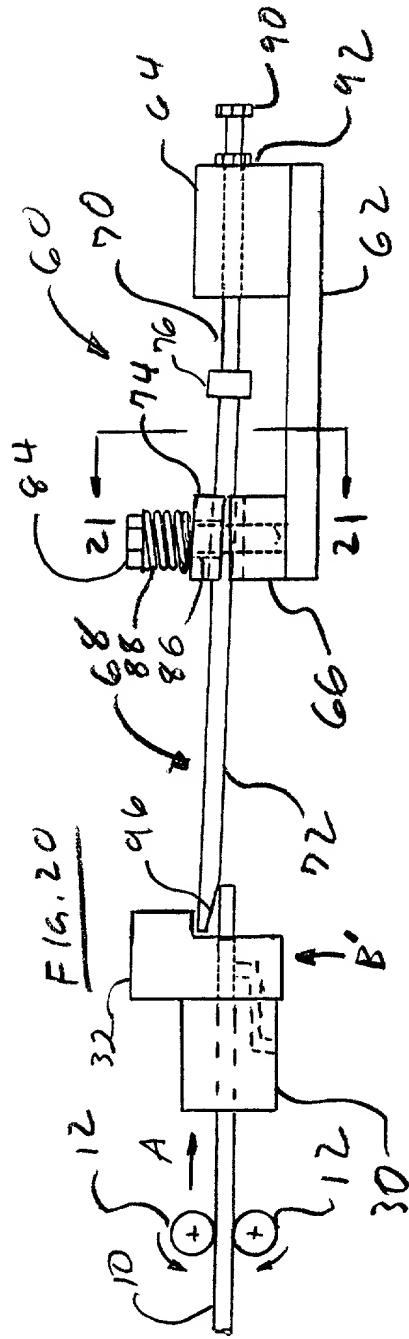
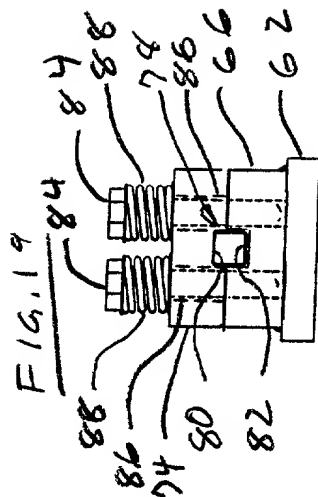
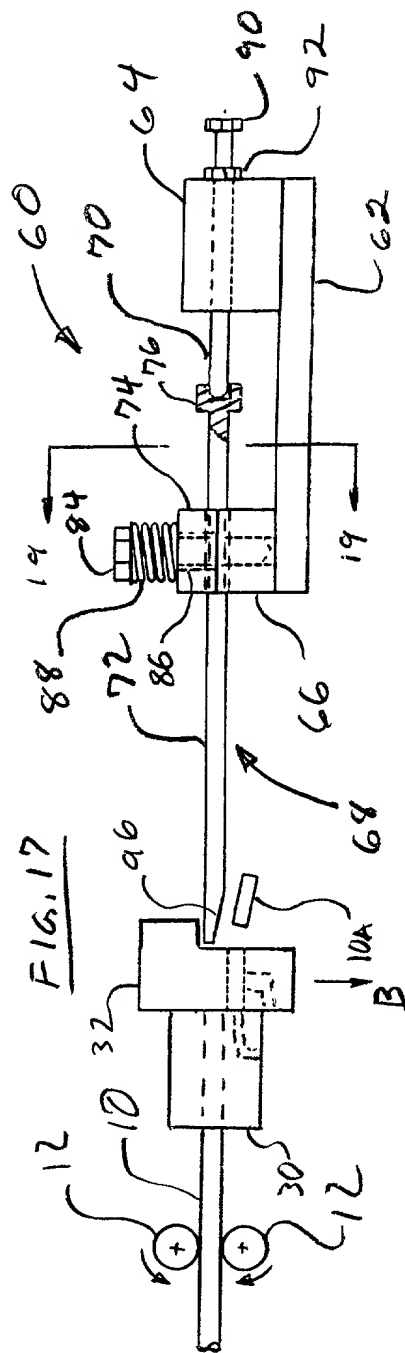
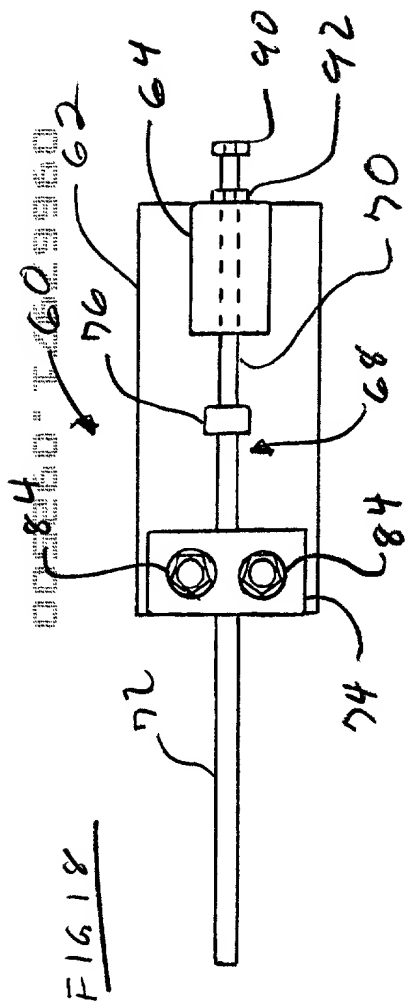


FIG. 22


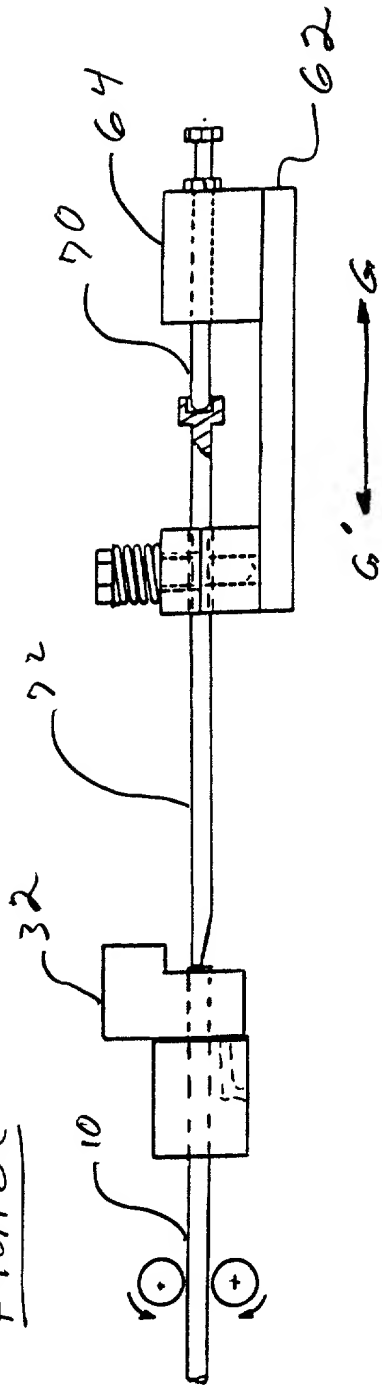


FIG. 23

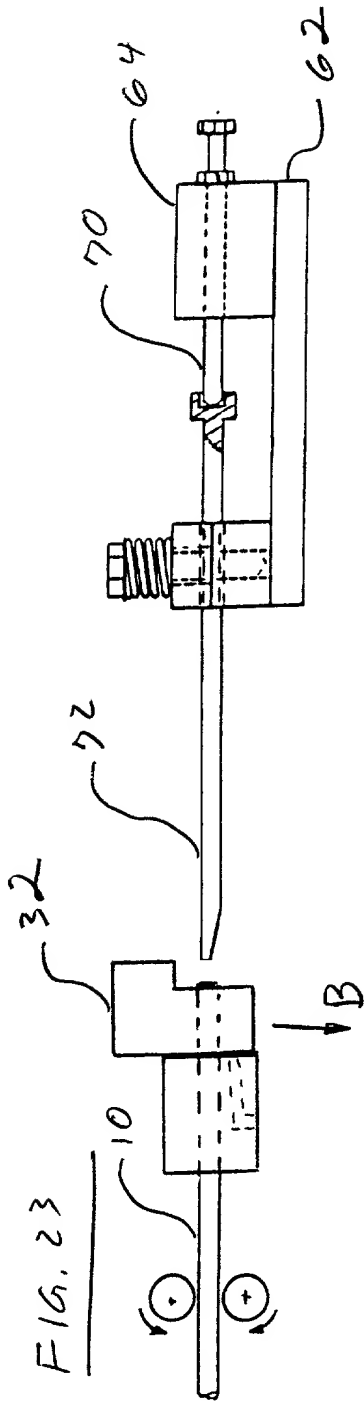

Please type a plus sign (+) inside this box → ☒

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	
	First Named Inventor	Hulstedt, Bryan
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

AIR EJECTION AND COMPLIANT GAGE PIN FOR ROD CUTTING MACHINES

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☒

PTO/SB/01 (12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number 20606
OR
☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here


Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to: ☒ Customer Number or Bar Code Label 20606 OR ☐ Correspondence address below

Name					
Address					
Address					
City		State		ZIP	
Country		Telephone	(815) 987-9820	Fax	(815) 987-9869

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
Bryan		Hulstedt			
Inventor's Signature				Date	9-22-00
Residence: City	Rockford	State	IL	Country	U.S.A.
				Citizenship	US
Post Office Address	6290 White Buck Trail				
Post Office Address					
City	Rockford	State	IL	ZIP	61102
				Country	U.S.A.

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto